


CAMBLOCK PLUS

2.5mm Pitch Pluggable Screwless Terminal Blocks

- 2-12 pole solid block
- Screwless connectivity
- 0.12mm² - 0.5mm² (26-20AWG) solid cable
- Pluggable male-female connectors
- Polarised mouldings
- Moulded in green UL94-V0, flame retardant PA66
-  approved

Female Connector



TYPE NO.	POLES	LENGTH
CSTBP92HC/2	2	5.6mm
CSTBP92HC/3	3	8.1mm
CSTBP92HC/4	4	10.6mm
CSTBP92HC/5	5	13.1mm
CSTBP92HC/6	6	15.6mm
CSTBP92HC/7	7	18.1mm
CSTBP92HC/8	8	20.6mm
CSTBP92HC/9	9	23.1mm
CSTBP92HC/10	10	25.6mm
CSTBP92HC/11	11	28.1mm
CSTBP92HC/12	12	30.6mm

CSTBP92HC



SPECIFICATION




Rating	UL=4A/150V, IEC=5A/250V
Insulation resistance	500MΩ/500V
Withstand voltage	AC1250V/1min
Contact resistance	20mΩ (max)
Working temperature	-40°C to +105°C
Mouldings	UL94-V0, flame retardant PA66
Spring	Stainless steel
Contact	Bronze, Ni plated
Recommended PCB hole size	1.4mm

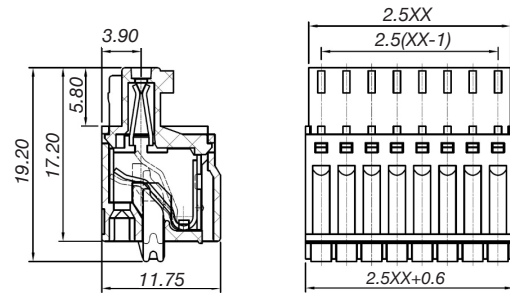

Male Header Vertical

TYPE NO.	POLES	LENGTH
CSTBP93VC/2	2	6.9mm
CSTBP93VC/3	3	9.4mm
CSTBP93VC/4	4	11.9mm
CSTBP93VC/5	5	14.4mm
CSTBP93VC/6	6	16.9mm
CSTBP93VC/7	7	19.4mm
CSTBP93VC/8	8	21.9mm
CSTBP93VC/9	9	24.4mm
CSTBP93VC/10	10	26.9mm
CSTBP93VC/11	11	29.4mm
CSTBP93VC/12	12	31.9mm

CSTBP93VC

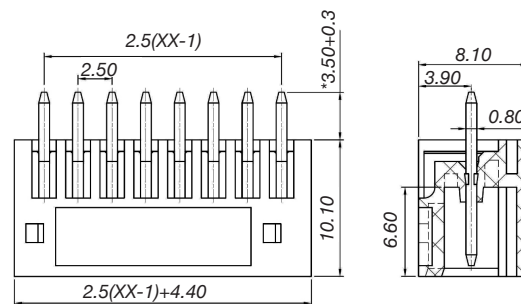

Male Header Horizontal

TYPE NO.	POLES	LENGTH
CSTBP93HC/2	2	6.9mm
CSTBP93HC/3	3	9.4mm
CSTBP93HC/4	4	11.9mm
CSTBP93HC/5	5	14.4mm
CSTBP93HC/6	6	16.9mm
CSTBP93HC/7	7	19.4mm
CSTBP93HC/8	8	21.9mm
CSTBP93HC/9	9	24.4mm
CSTBP93HC/10	10	26.9mm
CSTBP93HC/11	11	29.4mm
CSTBP93HC/12	12	31.9mm

CSTBP93HC

